

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
26 August 2004 (26.08.2004)

PCT

(10) International Publication Number
WO 2004/071914 A1

(51) International Patent Classification⁷: **B65H 19/22**,
19/26

Graziano [IT/IT]; Via Romana Est 119, I-55016 Porcari,
Lucca (IT).

(21) International Application Number:
PCT/IT2004/000049

(74) Agents: **MANNUCCI, Michele** et al.; Uff. Tecn. Ing. A.
Mannucci S.r.l., Via della Scala, 4, I-50123 Firenze (IT).

(22) International Filing Date: 9 February 2004 (09.02.2004)

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
FI2003 A 000036 12 February 2003 (12.02.2003) IT

(71) Applicant (*for all designated States except US*): **FABIO
PERINI S.p.A.** [IT/IT]; Zona Ind.le P.I.P. Mugnano Sud,
I-55100 Lucca (IT).


(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **BENVENUTI, An-
gelo** [IT/IT]; Via del Chiasso, 327, I-55100 Lucca (IT).
MADDALENI, Romano [IT/IT]; Via Valdinievole Sud
102, I-56031 Bientina, Pisa (IT). **MAZZACCHERINI,**

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,

[Continued on next page]

(54) Title: REWINDING MACHINE TO PRODUCE LOGS OF WEB MATERIAL AND RELATIVE WINDING METHOD

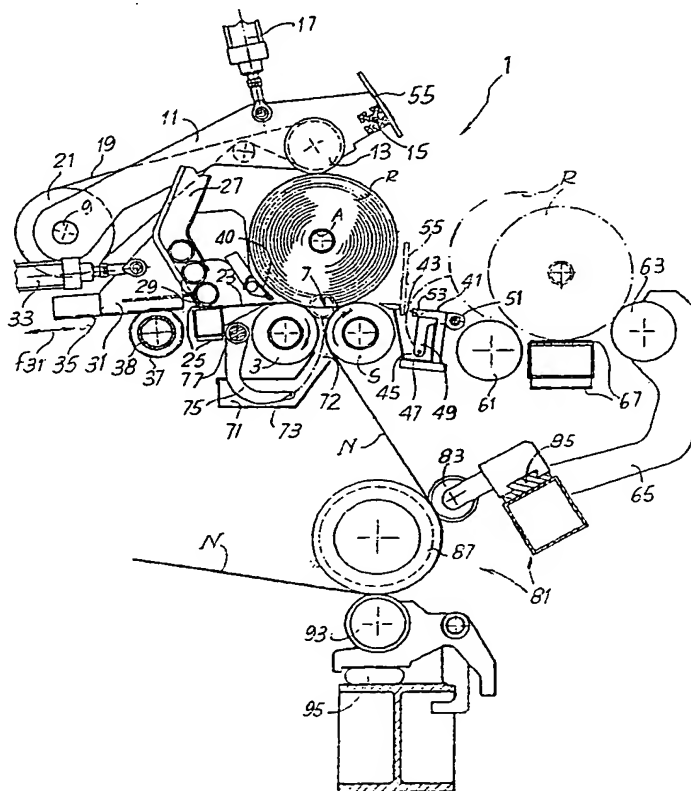

(57) Abstract: The machine comprises in combination: a winding cradle (7); an insertion member (29) to insert winding cores (A, A1) into said cradle; an ejector (39) to eject the logs formed from said cradle (7) causing them to roll on an unloading chute (41); a severing device (55, 53) to sever the web material after ejection of the log from said cradle. Disposed along the unloading chute is an aperture (43) elongated in a direction transverse to the direction in which the log is unloaded along said unloading chute. Moreover, the severing device (53, 55) includes a movable element (55) that is inserted into said aperture (43) to cause severing of the web material between the cradle and the finished log.

WO 2004/071914 A1